

Designing the Future

*clear ahead*



PEN CRUISE

**flex**<sup>®</sup>  
DIMENSION-POLYANT.COM

**FLEX<sup>®</sup> PEN CRUISE**

DIMENSION-POLYANT's FLEX<sup>®</sup> line stands for "Fill Laminate Extra X". The FLEX<sup>®</sup> range of fabrics is suited to racing and cruising sails. Foundations of all FLEX<sup>®</sup> laminate constructions are strong fill and warp yarns. Additional 20° and 30° "Double X" patterns from the fill absorb multiple load situations. Thanks to its novel construction, FLEX<sup>®</sup> handles strain in six different directions, resulting in unprecedented shape retention characteristics. In addition to primary loads, off-angle loads in clew, head and tack areas, mid leech and luff are catered for. FLEX<sup>®</sup> will also absorb those dynamic loads that occur during sailing and enables excellent shape control. FLEX<sup>®</sup> styles are crosscut fabrics and available with several fibre densities which can be combined in a sail in accordance with the expected load situation. FLEX<sup>®</sup>'s firmly locked-up fiber matrix guarantees long performance life and superior durability.



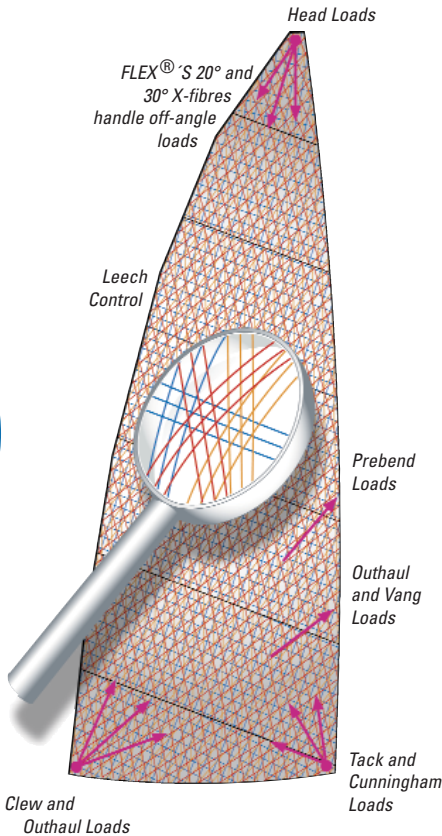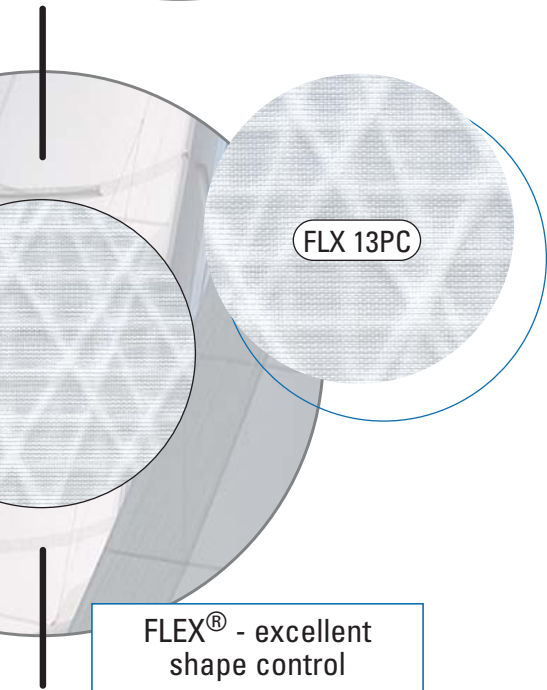

sailcloth  
technology

**DIMENSION-POLYANT GmbH, Germany**  
**Headquarters**

Speefeld 7  
D-47906 Kempen  
Phone: +49 (2152) 891 0  
Fax: +49 (2152) 891 149  
info@dimension-polyant.com

**DIMENSION-POLYANT SAS, France**

Rue Newton  
Parc Technologique  
F-17000 La Rochelle  
Phone: +33 (0) 546 282 201  
Fax: +33 (0) 546 412 840  
larochelle@dimension-polyant.com

**DIMENSION-POLYANT SAS, France**

Port de la Pointe Rouge  
F-13008 Marseille  
Phone: +33 (0) 491 736 628  
Fax: +33 (0) 491 722 505  
marseille@dimension-polyant.com

**DIMENSION-POLYANT UK Ltd., United Kingdom**

Unit 11, Kingdom Close  
Kingdom Business Park  
Segensworth East  
GB-Fareham Hampshire PO15 5TJ  
Phone: +44 (1489) 570 551  
Fax: +44 (1489) 570 451  
uk@dimension-polyant.com

**DIMENSION-POLYANT Inc., USA**


78, Highland Drive  
USA-Putnam CT 06260  
Phone: +1 (860) 928 8300  
Fax: +1 (860) 928 8330  
info@us.dimension-polyant.com

**DIMENSION-POLYANT Sailcloth PTY Ltd., Australia**

P.O. Box 825  
Unit 7/9 Powells Rd.  
AUS-Brookvale N.S.W. 2100  
Phone: +61 (2) 9905 9565  
Fax: +61 (2) 9905 9569  
dp-aus@dimension-polyant.com

**FLEX® - excellent  
shape control**

- Multi-directional load handling – 0° Warp/90° Fill, double 20° yarns, and double 30° yarns means FLEX® handles load in six directions
- Leech stability – FLEX®'s double "X"s handle mid-leech loads of high- and low-aspect mains and genoas
- Tear strength – Strong, durable fill and warp yarns make FLEX® a tough, durable material
- Maximum draft position – Multi-directional yarn layout addresses stability in draft position
- Step-up construction – Progressive weights in each FLEX® line allow step-up construction
- Ease of construction – FLEX®'s two extra "X"s means there's no need to flip-flop panels – and a FLEX® sail has fewer panels than other cross-cut products
- Sail weight reduction – FLEX® has the ability to split weights from high-load to low-load areas

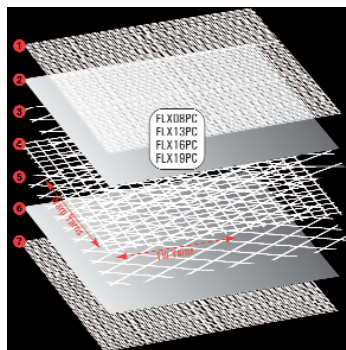

1. Anti-microbial taffeta for chafe protection and resistance to mildew
2. PET film with SPF+ UV inhibitor for low load stability and UV protection
3. 20° Yarns handle off-angle high loads: upper leech, head, tack, and clew
4. 30° Yarns handle off-angle low loads: mid-leech, prebend, boom vang
5. Fill/Warp Yarns handle primary loads, add breaking strength and durability
6. PET film with SPF+ UV inhibitor for low load stability and UV protection
7. Anti-microbial taffeta for chafe protection and resistance to mildew

Name	Warp/Fill	X-PLY 30 degree	X-PLY 20 degree
FLX 08 PC	4 x 4 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	
FLX 13 PC	4 x 4 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 16 PC	5 x 6 1,000 P x 1,000 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN
FLX 19 PC	5 x 7 1,000 P x 1,300 PEN	3 x 3 1,300 PEN	2 x 2 1,300 PEN

3 x 3 1,300 is 3,900 DPI to each side or 7,800 DPI  
2 x 2 1,300 is 2,600 DPI to each side or 5,200 DPI  
Light taffeta on both sides.

www.dimension-polyant.com